

Grab, Move & Cut HWP-200 GS Grapple Saw

Grab Them

The HWP-200 GS grapple saw's 37.5" opening can grab and lift downed trees, multiple logs or multi-stems making it your go-to attachment for cutting boiler fuel, clearing land and storm cleanup.



Move Them

When attached to your skid steer, tractor, front loader or excavator the HWP-200 GS's powerful jaws secure your load as you move to the wood pile or storage area.



Cut Them

The HWP-200 grapple saw can cut up to 27" diameter logs while they are held securely. You can do it all from the safety and comfort of your host machine's cab.

Halverson Wood Products, Inc.

218 587-2065

sales@halversonwp.com


Halversonwoodproducts.com



Grab Move & Cut
HWP-200 GS Grapple Saw

Specifications

Spec	Value
Opening	37.5" (95.25 cm)
Length	48" (122cm)
Width	33" (84 cm)
Height	42" (107 cm)
Weight	885 lbs (401 kg)
Material	3/8" & 5/8" Steel
Minimum Pressure	2,850 PSI (196 bar)
Flow	15 – 20 gpm (57 – 76 l/min)
Connections	1-Pressure, 1-Return, 1-Case Drain
Maximum Log Dia.	27" (69 cm)
Saw Bar	31" (80 cm) Harvester
Saw Chain	93DL 0.404 pitch/18HX Series
Saw Motor	Bent Axis Piston (Industrial)
Saw Oiler	Automatic 2 qt (1.89 l) Tank
Maximum Saw Cut	27" (69 cm)
In-Feed	Grapple
Mounting	Universal Quick Attach SAE Spec J2513

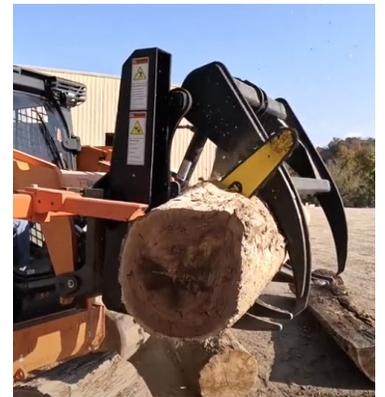

Halverson Wood Products, Inc.

218 587-2065

sales@halversonwp.com

Halversonwoodproducts.com

